




DHDB

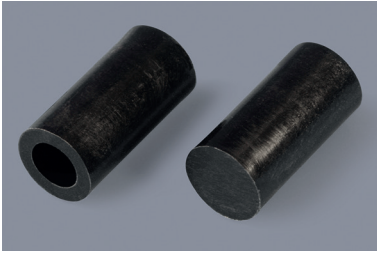

Kunststoff-Distanzbuchsen
Plastic spacer bushings



Artikel-Bez. für Distanzbuchsen (DHDB):
ID=3,4/AD=6,0/L=45,0 mm/PA-GV schwarz

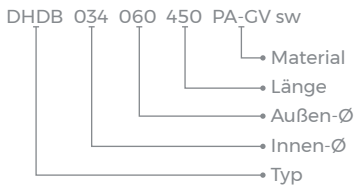


Artikel-Bez.		geeignet für Gewinde	ID ∅	AD ∅	S	L		Farbe
Typ	Material					min	max	
DHDB 034 060	PA-GV	M3	3,4	6,0	1,3	2,0	45,0	■
DHDB 042 080	PA-GV	M4	4,2	8,0	1,5	2,0	45,0	■
DHDB 050 070	PA-GV	M5	5,0	7,0	1,0	2,0	53,0	■
NEW DHDB 055 085	PA-GV	M5	5,5	8,5	1,5	2,0	37,0	■
NEW DHDB 062 080	PA-GV	M6	6,2	8,0	1,0	2,0	30,0	■
DHDB 062 100	PA-GV	M6	6,2	10,0	1,5	2,0	45,0	■


Längenraster: 1,0 mm (Zwischenlängen a. A.) · Unit: mm · MOQ 100x

Standard-Material:	PA-GV	UL-94 HB	■ schwarz	-40°C bis +110°C
Material auf Anfrage:	PS	UL-94 HB	□ natur	-40°C bis +70°C
	PA-GV	UL-94 V-0	■ rostbraun	-40°C bis +200°C


DHM

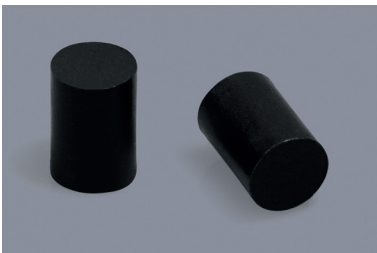

Kunststoff-Abstandsrolle, massiv
Solid round plastic spacers



Artikel-Bez. für Abstandsrollen (DHM):
AD=10,0/L=30,0 mm/PA-GV schwarz

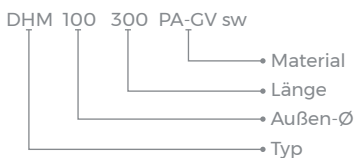

Artikel-Bez.		AD ∅	Fase beidseitig	L		Farbe
Typ	Material			min	max	
DHM 026	PA-GV	2,6	0,2x45°	2,0	30,0	■
DHM 040	PA-GV	4,0	-	1,0	20,0	■
DHM 050	PA-GV	5,0	-	2,0	30,0	■
DHM 060	PA-GV	6,0	-	2,0	45,0	■
DHM 080	PA-GV	8,0	-	2,0	45,0	■
DHM 100	PA-GV	10,0	-	2,0	45,0	■

Längenraster: 1,0 mm (Zwischenlängen a. A.) · Unit: mm · MOQ 100x

Standard-Material:	PA-GV	UL-94 HB	■ schwarz	-40°C bis +110°C
Material auf Anfrage:	PS	UL-94 HB	□ natur	-40°C bis +70°C
	PA-GV	UL-94 V-0	■ rostbraun	-40°C bis +200°C