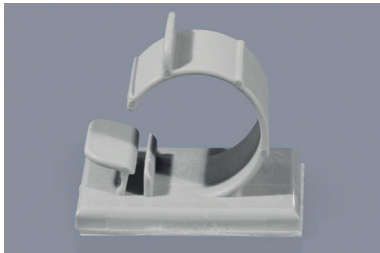



RKA

Rundkabelhalter, selbstklebend

Self-adhesive round cable holders

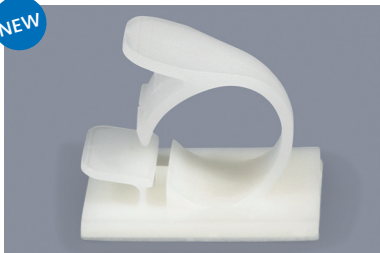


Art.-Nr.	Artikel-Bez.	KD ø	L	W	W2	Farbe
11335	RKA-048-G-A grau	5,0	16,0	18,8	9,7	■
34545	RKA-064-G-A grau	6,4	22,1	25,4	16,0	■
NEW 11337	RKA-095-G-A grau	9,5	25,4	25,4	12,7	■
26731	RKA-104-N-A natur	10,4	21,6	17,0	12,0	□
03496	RKA-110-G-A grau	11,0	25,3	25,4	16,1	■
34546	RKA-127-G-A grau	12,7	30,7	25,4	16,3	■
03497	RKA-191-G-A grau	19,6	37,0	29,3	16,9	■
11338	RKA-254-G-A grau	26,8	57,1	50,5	31,7	■


weitere Abmessungen a. A. · Unit: mm · MOQ 100x

Standard-Material: PA UL-94 V-2 ■ grau (G) -40°C bis +75°C
 PA UL-94 V-2 □ natur (N) -40°C bis +75°C

Info: Klebefolie: Acrylat (3M), Dauergebrauchstemperatur -30°C bis +75°C

RKAS
NEW

Rundkabelhalter, selbstklebend

Self-adhesive round cable holders

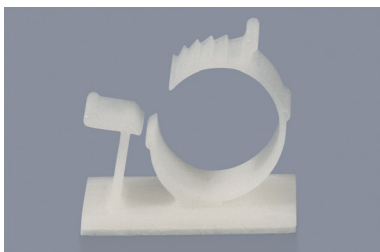


Art.-Nr.	Artikel-Bez.	KD ø	L	W	W2	Höhe ca.	Farbe
natur							
30631	RKAS-040-N-A	4,0	13,0	10,0	6,8	9,0	□
30632	RKAS-060-N-A	6,0	15,0	13,0	9,0	11,0	□
30633	RKAS-090-N-A	9,0	21,6	19,0	12,8	14,0	□
30634	RKAS-110-N-A	11,0	25,0	20,0	13,2	16,0	□
30635	RKAS-134-N-A	13,4	32,0	25,4	16,0	18,4	□
30636	RKAS-180-N-A	18,0	35,8	24,8	16,8	23,0	□
30637	RKAS-254-N-A	25,4	56,1	50,0	20,1	30,5	□
30638	RKAS-300-N-A	30,0	56,1	50,0	20,1	35,0	□


 *ohne Bohrung und Abziehhilfe · ¹ohne Bohrung · Unit: mm · MOQ 50/100x

Standard-Material: PA UL-94 V-2 □ natur -40°C bis +75°C

Info: Klebefolie: Acrylat, Dauergebrauchstemperatur -30°C bis +75°C

RKAV

Rundkabelhalter, selbstklebend

Self-adhesive round cable holders



Art.-Nr.	Artikel-Bez.	KD ø	L	W	W2	Höhe	Farbe
natur							
26732	RKAV-055/065-A-RT	5,5-6,5	21,6	16,5	10,0	18,0	□
01068	RKAV-079/103-A-RT	7,9-10,3	25,4	19,1	10,2	22,0	□
26733*	RKAV-110/133-A	11,0-13,3	25,4	15,0	10,0	24,8	□
01067	RKAV-119/143-A-RT	11,9-14,3	31,5	19,1	10,0	27,7	□
01069	RKAV-147/191-A-RT	14,7-19,1	38,1	19,1	12,7	32,8	□
26734*	RKAV-180/220-A	18,0-22,0	36,0	19,0	12,7	35,5	□
01070	RKAV-220/265-A-RT	22,2-25,4	50,5	25,4	12,7	44,5	□
27081 ¹	RKAV-254/371-A-RT	25,4-31,7	63,5	25,4	12,7	50,8	□

 *ohne Bohrung und Abziehhilfe · ¹ohne Bohrung · Unit: mm · MOQ 100x

Standard-Material: PA UL-94 V-2 □ natur -40°C bis +75°C

Info: Klebefolie: Acrylat, Dauergebrauchstemperatur -30°C bis +60°C