



SRH



Spreiznieten, einfach lösbar
Removable snap rivets




Art.-Nr.		Artikel-Bez.	B_{CH} ϕ	MS_{CH}	AD ϕ	KH	L	Typ
schwarz	weiß							
NEW 47435	47436	SRH-2685 "Farbe"	2,6	5,5-6,5	4,6	0,7	8,5	C
00650	40663	SRH-3035 "Farbe"	3,1	1,0-2,0	6,4	1,0	3,5	C
00651	40664	SRH-3045 "Farbe"	3,1	2,0-3,0	6,4	1,0	4,5	C
00652	40665	SRH-3055 "Farbe"	3,1	3,0-4,0	6,4	1,0	5,5	C
00653	40666	SRH-3065 "Farbe"	3,1	4,0-5,0	6,4	1,0	6,5	C
00654	30439	SRH-3080 "Farbe"	3,1	5,0-6,5	6,4	1,0	8,0	C
17884	47049	SRH-3090 "Farbe"	3,1	6,5-7,5	6,4	1,0	9,0	C
17885	47050	SRH-3100 "Farbe"	3,1	7,5-8,5	6,4	1,0	10,0	C
17886	40667	SRH-3535 "Farbe"	3,6	1,0-2,0	6,4	1,0	3,5	D
00655	40668	SRH-3545 "Farbe"	3,6	2,0-3,0	6,4	1,0	4,5	D
00656	40669	SRH-3555 "Farbe"	3,6	3,0-4,0	6,4	1,0	5,5	D
09721	47051	SRH-3560 "Farbe"	3,6	3,5-4,5	6,4	1,0	6,0	D
00657	40670	SRH-3570 "Farbe"	3,6	4,5-5,5	6,4	1,0	7,0	D
17887	40671	SRH-3580 "Farbe"	3,6	5,5-6,5	6,4	1,0	8,0	D

weitere Abmessungen, Materialien u. Farben (RAL) a. A. · Unit: mm · MOQ 100x

Typ C

Typ D

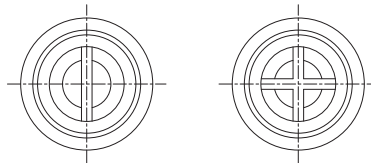

Standard-Material:

PA UL-94 V-2 ■ schwarz / □ weiß
-40°C bis +75°C

Material auf Anfrage:

PA UL-94 V-0 ■ schwarz
-40°C bis +75°C **V-0**



V-0 = Schwer entflammbar *Flame-resistant*

SRT

NEW



Spreiznieten mit Griff, einfach lösbar
Removable snap rivets, with handle

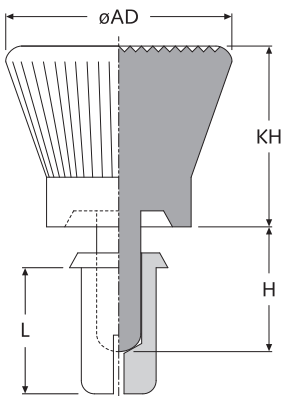


Art.-Nr.		Artikel-Bez.	B_{CH} ϕ	MS_{CH}	AD ϕ	KH	H	L	Typ
schwarz	weiß								
00691	00692	SRT-3035 "Farbe"	3,1	1,0-2,0	10,0	8,0	6,6	3,5	A + C
00693	00694	SRT-3045 "Farbe"	3,1	2,0-3,0	10,0	8,0	6,6	4,5	A + C
00695	00696	SRT-3055 "Farbe"	3,1	3,0-4,0	10,0	8,0	6,6	5,5	A + C
00697	00698	SRT-3065 "Farbe"	3,1	4,0-5,0	10,0	8,0	9,0	6,5	A + C
48513	48514	SRT-3075 "Farbe"	3,1	5,0-6,0	10,0	8,0	9,0	7,5	A + C
00699	00700	SRT-3080 "Farbe"	3,1	5,5-6,5	10,0	8,0	9,0	8,0	A + C
48515	48516	SRT-3535 "Farbe"	3,6	1,0-2,0	10,0	8,0	6,6	3,5	A + D
00701	00702	SRT-3545 "Farbe"	3,6	2,0-3,0	10,0	8,0	6,6	4,5	A + D
00703	00704	SRT-3555 "Farbe"	3,6	3,0-4,0	10,0	8,0	6,6	5,5	A + D
48517	48518	SRT-3560 "Farbe"	3,6	3,5-4,5	10,0	8,0	9,0	6,0	A + D
00705	00706	SRT-3570 "Farbe"	3,6	4,5-5,5	10,0	8,0	9,0	7,0	A + D
48519	48520	SRT-3580 "Farbe"	3,6	5,5-6,5	10,0	8,0	9,0	8,0	A + D
48521	48522	SRT-4050 "Farbe"	4,1	2,5-3,5	12,0	8,0	7,6	5,0	A + D
48523	48524	SRT-4060 "Farbe"	4,1	3,5-4,5	12,0	8,0	7,6	6,0	A + D
00707	00708	SRT-4070 "Farbe"	4,1	4,5-5,5	12,0	8,0	11,2	7,0	A + D
00709	00710	SRT-4080 "Farbe"	4,1	5,5-6,5	12,0	8,0	11,2	8,0	A + D
48525	48526	SRT-4090 "Farbe"	4,1	6,5-7,5	12,0	8,0	11,2	9,0	A + D
00711	00712	SRT-4100 "Farbe"	4,1	7,5-8,5	12,0	8,0	11,2	10,0	A + D

weitere Abmessungen, Materialien u. Farben (RAL) a. A. · Unit: mm · MOQ 100x

Typ C

Typ D

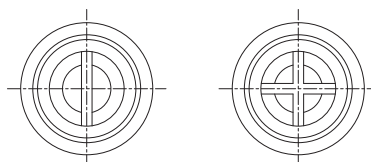

Standard-Material:

PA UL-94 V-2 ■ schwarz / □ weiß
-40°C bis +75°C

Material auf Anfrage:

PA UL-94 V-0 ■ schwarz
-40°C bis +75°C **V-0**