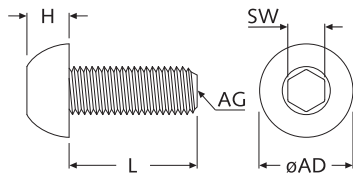


**DIN EN ISO 7380 INBUS**

**Halbrundkopfschrauben mit Innensechskant**

Hexagon socket button head screws


**Standard-Material:**

Stahl 10.9 verzinkt und Edelstahl A2

Material auf Anfrage:  
Stahl schwarz-verzinkt,  
vernickelt und A4


AG	M3	M4	M5	M6
AD Ø / H max	5,7 / 1,7	7,6 / 2,2	9,5 / 2,8	10,5 / 3,3
SW	SW2	SW2,5	SW3	SW4
L	Stahl 10.9 verzinkt <i>Steel 10.9 zinc-plated</i>			
5,0	28062	38664	28080	-
6,0	28063	28070	28081	-
8,0	28064	28071	28082	28091
10,0	28065	28072	28083	28092
12,0	28066	28073	28084	28093
16,0	28067	28074	28085	28094
20,0	28069	28076	28087	28096
25,0	38661	28078	28089	28098
30,0	38662	28079	28090	28099
40,0	38663	38665	38666	38667
L	Edelstahl A2 <i>Stainless Steel A2</i>			
5,0	28052	38671	-	-
6,0	28047	33743	28055	-
8,0	28048	33761	28056	38674
10,0	28049	33762	28057	35117
12,0	28050	33763	28058	35118
16,0	28051	33764	28059	35119
20,0	28054	33766	09474	35121
25,0	38668	33750	09475	35122
30,0	38669	33751	38672	35123
40,0	38670	33753	38673	35124

Bestellbsp: ISO 7380 I A2 M2,5x4 mm · weitere Abmessungen a. A. · Unit: mm · MOQ 100/1.000x

**DIN EN ISO 7380 TORX**

**Torx-Halbrundkopfschrauben**

Torx button head screws

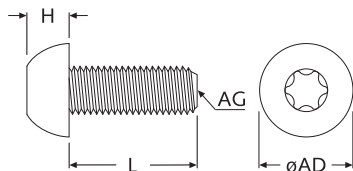
**Standard-Material:**

Stahl 8.8 verzinkt und Edelstahl A2

Material auf Anfrage:  
Stahl schwarz-verzinkt,  
vernickelt und A4

**Hinweis:** ähnlich der ISO 14583

\* auch mit Sperrverzahnung lieferbar

AG	M2	M2,5	M3	M4	M5	M6
AD Ø / H max	3,5 / 1,3	4,7 / 1,5	5,7 / 1,7	7,6 / 2,2	9,5 / 2,8	10,5 / 3,3
Torx	T6	T8	T10	T20	T25	T30
L	Stahl 8.8 verzinkt <i>Steel 8.8 zinc-plated</i>					
4,0	38409	38419	38430	-	-	-
5,0	38410	38420	38431	38441	-	-
6,0	38411	38421	38432	38442	38453	-
8,0	38412	38422	38433	38443	38454	38464
10,0	38413	38423	38434	38444	38455	38465
12,0	38414	38424	38435	38445	38456	38466
16,0	38416	38426	38437	38447	38458	38468
20,0	38417	38427	38438	38448	38459	38469
25,0	-	38428	38439	38449	38460	38470
30,0	-	-	38440	38450	38461	38471
40,0	-	-	38675	38452	38463	38473
L	Edelstahl A2 <i>Stainless Steel A2</i>					
4,0	38475*	38485	38495	-	-	-
5,0	38476	38486	38496	38506	-	-
6,0	38477*	38487	38497	38507	38518	-
8,0	38478	38488	38498	38508	38519	38529
10,0	38479	38489	38499	38509	38520	38530
12,0	38480	38490	38500	38510	38521	38531
16,0	38482	38492	38502	38512	38523	38533
20,0	38483	38493	38503	38513	38524	38534
25,0	-	38494	38504	38514	38525	38535
30,0	-	-	38505	38515	38526	38536
40,0	-	-	38676	38517	38528	38538

Bestellbsp: ISO 7380 St T M6x20 mm · weitere Abmessungen a. A. · Unit: mm · MOQ 100/1.000x